
Chameleon Creative Layer Panels

Specifications





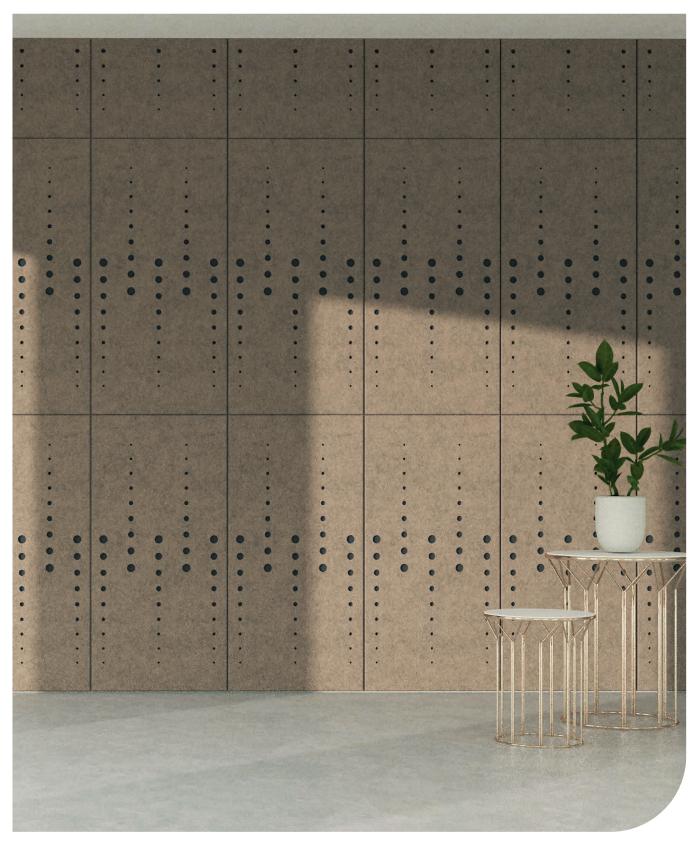

Colours

The 9mm PET felt from Chameleon Creative Panels is dyed-through. The color is also visible in the cutout. We have selected 21 colors, with a strong representation of gray tones and brown tones.






Anthracite PO21



General

Size (cm) (total m²)	Article number	Cut-out code (optional)	Number of panels	Gross weight	Nett weight
118 x 58 (2,74)	11210.100*	LP01	4	±11 kg	±10 kg
118 x 58 (2,74)	11210.101*	LP02	4	± 11 kg	±10 kg
118 x 58 (2,74)	11210.102*	LP03	4	± 11 kg	±10 kg
118 x 58 (2,74)	11210.103*	LP04	4	± 11 kg	±10 kg
118 x 58 (2,74)	11210.104*	LP05	4	± 11 kg	±10 kg
118 x 58 (2,74)	11210.105*	LP06	4	±11 kg	±10 kg
118 x 58 (2,74)	11210.106*	LP07	4	±11 kg	±10 kg
118 x 58 (2,74)	11210.107*	LP08	4	±11 kg	±10 kg
118 x 58 (2,74)	11210.108*	LP09	4	±11 kg	±10 kg
118 x 58 (2,74)	11210.109*	LP10	4	± 11 kg	±10 kg

^{*} Provide the color code of the front layer first with the article number, followed by the color code of the back layer, in the request for a quotation or order: [article number + color front + color back].

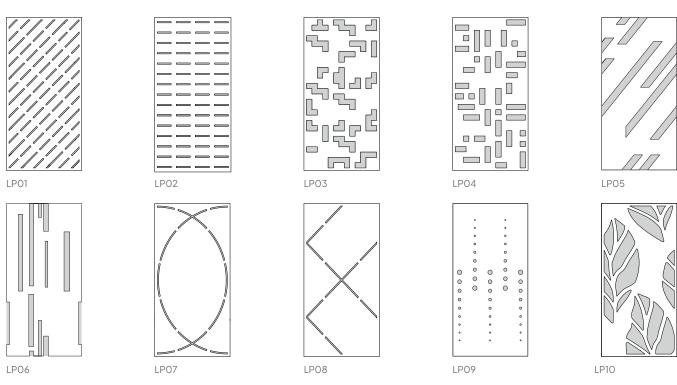







Technical

Material:	Consists of 100% recyclable Polyethylene terephthalate, including a portion from recycled PET bottles.
Properties:	Acoustic.
Thickness:	Approximately 21.3 mm thick (2x 9 mm bonded, including suspension hardware).
Cut-out:	Front panel with cutout.
Finish:	Edges are finished with a bevel-cut.
Acoustic value:	NRC: 0.5 (estimate, test results not yet available).
Fire resistance:	EN13501: B-s1, d0.
Installation:	Velcro.
Warranty:	2-year warranty.

Technical

1. Surface:	PET felt panel, approximately 18 mm thick
2. Mounting material:	Velcro, approximately 3.3 mm thick



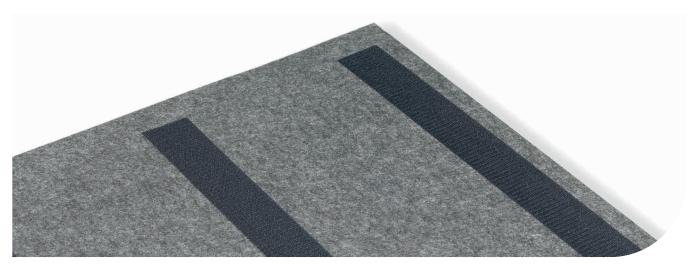

Packaging

Type:	Cardboard
Content:	4 Chameleon Creative Layer Panels, assembly manual
Packaging unit:	1box
Materials:	Corrugated cardboard, bubble wrap
Dimensions:	Approximately 210 x 620 x 1220 mm